



## Concore Casting beds

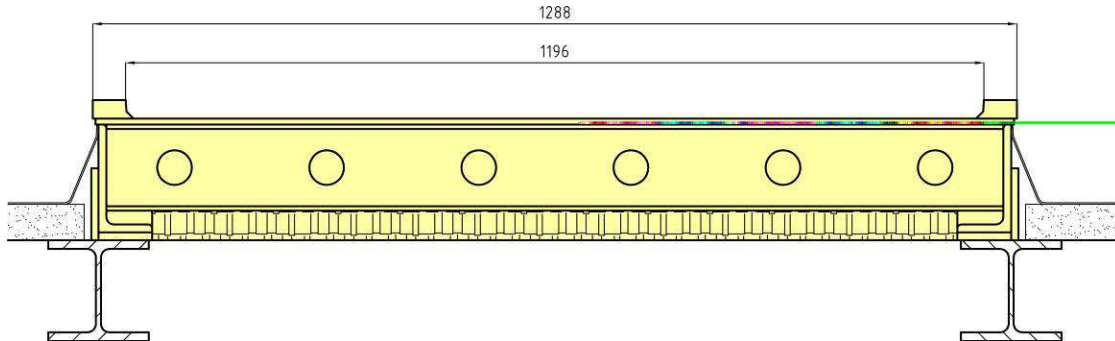

The Concore casting beds are delivered complete with heating pipes and insulation. Rigid build as 12m long ready to install units. The delivery is with or without pumps and valves ready to be connected to Concore boiler and heat control system. The casting beds are to be welded to the fixing plates in the floor and to the pre stressing abutments at the end of the casting beds. The edges of the casting bed consists of profiled steel rails which are forming the edge of the hollow core slab. The rails also serve as rails for all machines that are used on the casting bed during the process of production.

Optional, Concore can offer special produced steel channels to be installed between the casting beds and on the outside of last and first casting bed. These steel channels provide an easy to clean surface.

- High quality steel
- 12 m complete ready to install units
- Produced with narrow tolerances
- Special treated steel surface

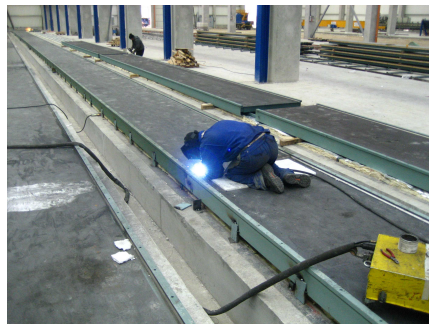

### Technical details:

Tolerance	± 1,5 mm over the distance of 3.000 mm
Width	+0 -2 mm over the distance of 12.000,,
Dimensions L x W	12.000 x 1.288 mm
Heating pipes	1,5" steel pipes
Insulation beneath the bed	30 mm
Steel surface	8mm special treated steel plate